

Toe Jacks


5.5, 11 & 27.5 Ton Capacity

Get under equipment with only 26.9 mm of ground clearance.



JACKS

- With lifting points on the toe and on the top, these extremely rugged jacks are ideal for machine lifting, rigging, lift truck service and much more.
- Choose from 5.5-ton, 11-ton, and now, an amazing 27.5-ton lifting capacity.
- All jacks operate both vertically and horizontally.
- All jacks meet ASME B30.1 standards and carry the Power Team Marathon Lifetime Warranty.
- Base, toe and pumping assembly swivel independently, allowing the jack to work in confined areas.

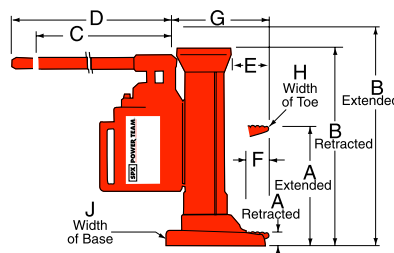

ORDERING INFORMATION

See current price list for shipping weights.

Cap. Tons	Max Lift Stroke	Order Number	A		B		Strokes to extend piston 25 mm	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	Handle Effort at Max load (kg)	Carry Handle	Product Wt. (kg)
			Ret. (mm)	Ext. (mm)	Ret. (mm)	Ext. (mm)											
5½	210 mm	J58T	30	238	375	584	8	368	451	71	56	176	41	130	38.1	Yes	19.5
11	235 mm	J109T	30	264	419	654	13	368	451	76	56	183	64	171	40	Yes	29
27½	233 mm	J259T	54	289	505	738	21	210	756	146	102	267	89	270	40	Yes	92.1


Economy Toe Jacks

2, 5 & 10 Ton Capacity

Just the power you need at a price you can afford.



- These bottle jack-style toe jacks are loaded with many of the same features as our standard bottle jacks, but the toe-lift feature and swiveling pump handle socket make them ideal for machinery lifting and positioning.
- An internal pressure relief provides added safety by limiting the jack's lifting capability to the capacity of the toe.
- Spring return is an added feature on the larger jacks.
- All jacks meet ASME B30.1 standards and carry the Power Team Marathon Lifetime Warranty.
- Swiveling pump handle assembly available on the 5- and 10-ton models. The swiveling jack assembly allows you to access and pump the unit from numerous positions.



ORDERING INFORMATION

See current price list for shipping weights.

Cap. Tons	Max Lift Stroke	Order Number	Retract. (mm)	Extend. (mm)	Retract. (mm)	Extend. (mm)	Strokes to extend piston 25 mm	C (mm)	D (mm)	E (mm)	F (mm)	Handle Effort at Max load (kg)	Carry Handle	Product Wt. (kg)
2	121 mm	J24T	16	137	232	356	14	47.5	181	51	125	19	Yes	8.3
5	121 mm	J55T	25	127	292	419	22	47.5	257	191	157	27.2	Yes	24
10	146 mm	J106T	32	178	324	470	31	64	292	100	241	33.1	Yes	38

JACKS