



Pull Cylinders (RP Series)

Single-Acting, Spring-Return — 2 & 5 Ton Capacity

Designed for pulling and tensioning applications.





- Designed for pulling and tensioning applications.
- Heavy duty compression spring provides long cycle life and rapid extension of piston.
- Spring automatically extends piston rod when pump pressure is released.

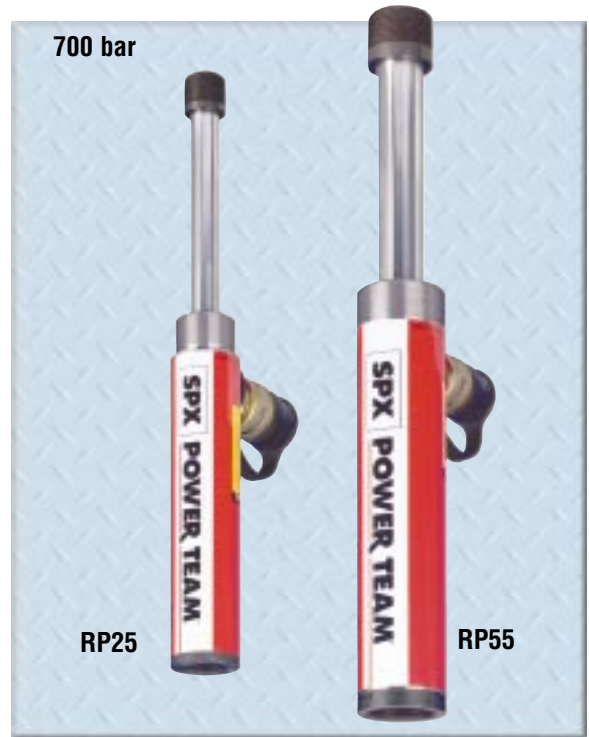

CLEVIS ORDERING INFORMATION

Use with Cyl No.	Order No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
RP25	421057*	130.3	109.5	33.3	50.8	19.1
RP55	421056**	152.4	127.0	38.1	63.5	22.4

* For base mounting, extension rod 351106 is required.
 ** For base mounting, extension rod 351075 is required.

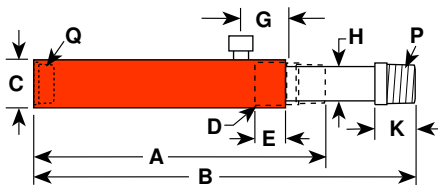

CYLINDER ORDERING INFORMATION

See current price list for shipping weights

Cyl. Cap. (Tons)	Stroke (mm)	Order No.	Oil Cap. (cu. cm.)	A	B	C	D	E	G	H	K	P	Q	Bore Dia. (mm)	Cyl. Eff. Area (sq. cm.)	Internal Pressure at Cap. (bar)	Metric Tons at 700 bar	Prod. Wt. (kg)
				Re-tracted Height (mm)	Ex-tended Height (mm)	Outside Dia. (mm)	Collar Thread (in.)	Collar Thread Length (mm)	Cylinder Top to Port (mm)	Piston Rod Dia. (mm)	Piston Rod Protrusion (mm)	Piston Rod Thread (NPTF)	Base Thread (NPTF)					
2	127.0	RP25	45.3	242.9	379.9	44.5	1½-16	25.4	42.9	19.1	25.4	¾-14	¾-14	28.6	3.5	500	2.5	1.8
5	139.7	RP55	102.0	301.6	441.3	57.2	2¼-14	25.4	42.9	30.2	34.9	1¼-11½	1¼-11½	42.9	7.3	610	5.1	5